

TANKJET 63225 & 63225-3A SPRAY BALL FEATURES AND BENEFITS

- Stationary spray balls are ideal for sanitary rinsing and low-pressure washing, offering a low-cost way to handle easy-to-remove residues
- Wrap-around retaining clip is supplied with each spray ball
- Because there are no moving parts spray balls are well-suited to clean-in-place (CIP) installations
- 63225-3A sanitary spray balls have a polished 32Ra interior and exterior surface finish with a threadless, self-draining design that prevents buildup
- Choice of 180° or 360° spray coverage, with custom drilling available for both spray pattern and flow rate on model 63225-3A spray balls
- Can be installed in any position
- 316L stainless steel construction permits use with a wide array of chemicals

R
RINSING

SPRAY COVERAGE
63225 360°





TankJet 63225-3A spray balls

SPECIFICATIONS

TankJet 63225 & 63225-3A Spray Balls	
Max. tank diameter:	13 ft. (4 m)
Operating principle:	Stationary
Flow rate:	22 to 51 gpm (83 to 192 lpm)
Operating pressure:	15 to 40 psi (1.0 to 2.8 bar)
Max. temperature:	400°F (204°C)
Materials:	316L stainless steel
Inlet tube size:	3/4", 1" TankJet 63225 3/4", 1", 1-1/2" TankJet 63225-3A
Optional accessories:	Strainers, recommended mesh size: 16 to 50 (1190 to 300 micron). See page G2

SPRAY COVERAGE 63225 - 3A




MOUNTING OPTIONS

Vertical	↑	↓
Horizontal	←	→
45° Up	↖	↗
45° Down	↙	↘


IDEAL FOR CLEANING:

- Chemical processing tanks
- Food processing vats and tanks
- Pharmaceutical vessels

PERFORMANCE DATA


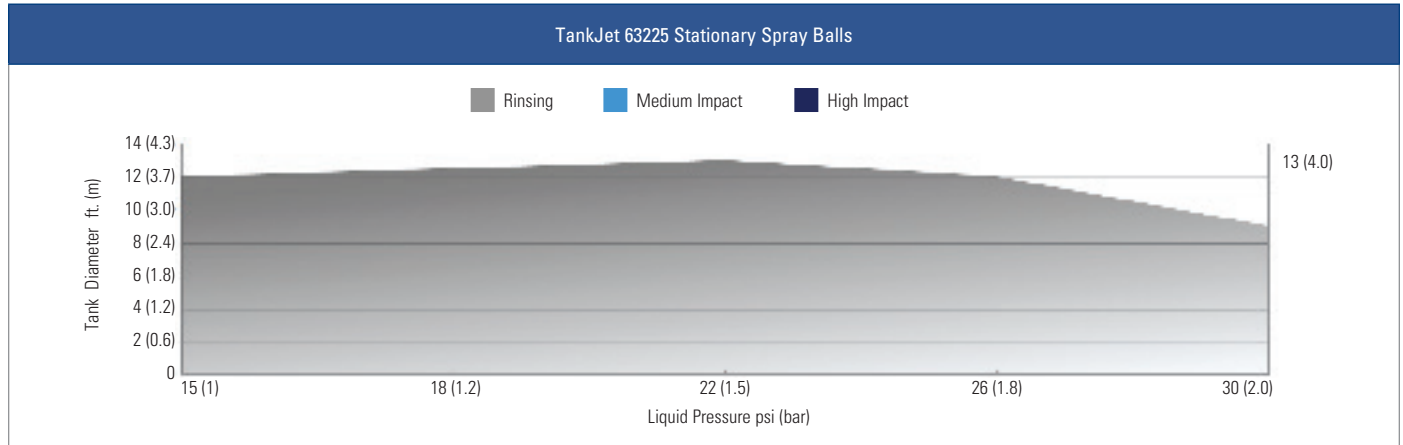


Nozzle Type/Size	Liquid Flow Capacity gpm (lpm)			Max. Tank Dia. ft. (m)
	15 psi (1 bar)	22 psi (1.5 bar)	30 psi (2 bar)	
63225E-3/4-22-316L	22 (83)	27 (102)	31 (117)	10 (3.0)
63225E-1-32-316L	32 (121)	39 (148)	45 (170)	13 (4.0)

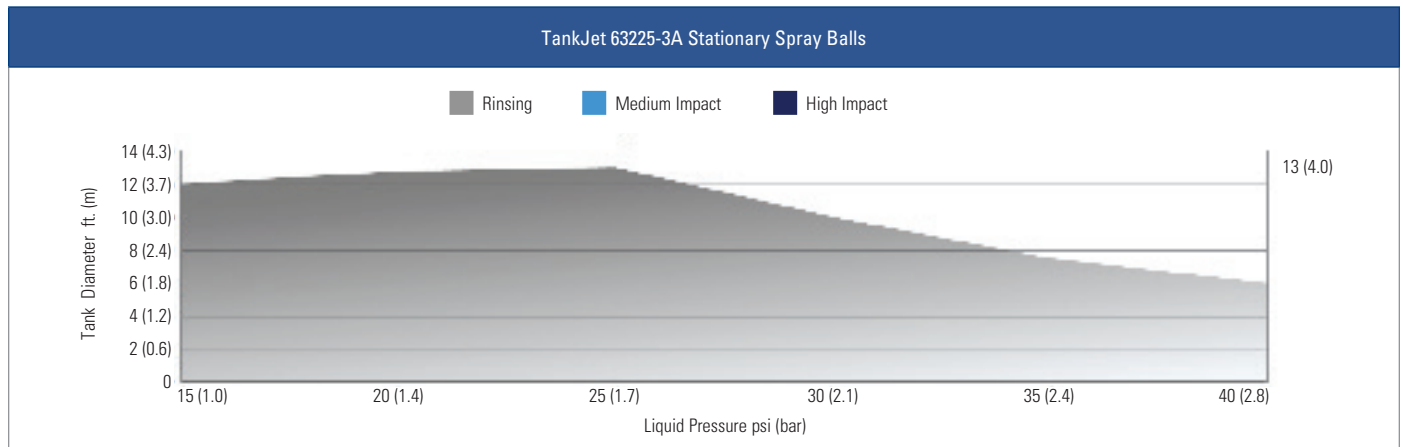

Nozzle Model/Size	Liquid Flow Capacity gpm (lpm)			Max. Tank Dia. ft. (m)
	15 psi (1 bar)	25 psi (1.7 bar)	40 psi (3 bar)	
63225E-.75-1.5-40-3A	31 (115)	40 (151)	51 (192)	10 (3.0)
63225E-1-2-40-3A				13 (4.0)
63225A-1.5-2.5-40-3A				13 (4.0)
63225E-1.5-2.5-40-3A				13 (4.0)
63225E-1.5-3-40-3A				13 (4.0)
63225E-1.5-4-40-3A				13 (4.0)

DIMENSIONS AND WEIGHTS

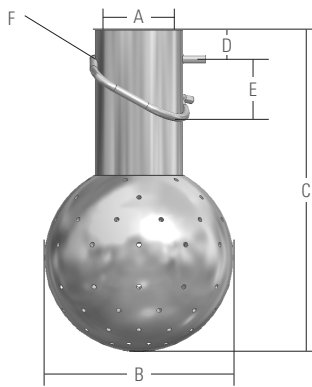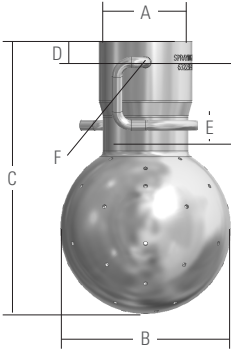TankJet 63225 & 63225-3A Spray Balls	Nozzle Type	A Inlet Conn. in.	B (Dia.) in. (mm)	C Length in. (mm)	D in. (mm)	E in. (mm)	F (Pin dia) in. (mm)
 <p>63225</p>	63225E-3/4-22-316L	3/4	2 (51)	3.64 (93)	.51 (13)	1.25 (31.8)	.13 (3.3)
	63225E-1-32-316L	1	2.5 (64)	4.40 (112)	.51 (13)	1.56 (39.6)	.13 (3.3)
 <p>63225-3A</p>	63225E-.75-1.5-40-3A	3/4	1.5 (38.1)	2.53 (64.3)	.33 (9.5)	.25 (6.4)	.14 (3.6)
	63225E-1-2-40-3A	1	2 (50.8)	3.31 (84.1)	.33 (9.5)	.33 (9.5)	.14 (3.6)
	63225A-1.5-2.5-40-3A	1- 1/2	2.5 (63.5)	4.25 (108)	.25 (6.4)	.75 (19.1)	.02 (5.2)
	63225E-1.5-2.5-40-3A	1- 1/2	2.5 (63.5)	4.25 (108)	.25 (6.4)	.75 (19.1)	13/64 (5.2)
	63225E-1.5-3-40-3A	1- 1/2	3 (76.2)	4.78 (121.4)	.25 (6.4)	.75 (19.1)	13/64 (5.2)
	63225E-1.5-4-40-3A	1- 1/2	4 (101.6)	5.75 (146)	.25 (6.4)	.75 (19.1)	.20 (5.2)

ORDERING INFORMATION

63225 TANK CLEANING SPRAY BALLS

Nozzle Type	Coverage Type	Inlet Tube Size	Capacity Size	Material Code
-------------	---------------	-----------------	---------------	---------------

EXAMPLE: 63225 - E - 3/4 - 22 - 316L

63225-3A TANK CLEANING SPRAY BALLS

Nozzle Type	Coverage Type	Inlet Tube Size	Ball Diameter	Capacity Size	3A Designation
-------------	---------------	-----------------	---------------	---------------	----------------

EXAMPLE: 63225 - E - .75 - 1.5 - 40 - 3A

